

# Synexis C30

Charger



Picture with transmitter, receivers and headphones.  
Supplied without devices.



Picture of optional Synexis CTH 30 charging compartment with  
transmitter and accessories. Supplied without devices.

## FEATURES

- Rugged, yet lightweight charging case with reinforced frame for a maximum of 30 beltpack receivers/ transmitters
- Anodised aluminium profiles
- Scratch-resistant, silver-grey laminate surface
- Removable and lockable cover with chromed automatic locks
- Matt chromed ergonomic carrying handle
- Inside coated with rigid foam according to UL 94 HBF
- Supplied with shoulder strap
- Chromed, detachable hinges
- Plastic base
- Optional Synexis CTH 30 charging compartment for handheld transmitter
- Active ventilation
- Integrated power supply unit

## COMPONENTS

Synexis C30 Case for charging, transport and storage with thirty charging compartments for beltpack receivers/transmitters, one optional charging compartment for handheld transmitter . . . . Order # 723.754

## APPLICATIONS

The Synexis C30 charger is provided with 30 charging compartments for Synexis TP beltpack transmitters or RP beltpack receivers as well as a connection for an optional charging compartment for the Synexis TH handheld transmitter. The charging state of the rechargeable batteries is indicated by an LED of the appropriate transmitter or receiver. For transport the charging case is provided with an ergonomic carrying handle. For carrying over the shoulder a strap can be mounted. The practical charging case is also used for storing the whole Synexis system.

## SUPPLIED ACCESSORIES




- Shoulder strap
- Power cable

## OPTIONAL ACCESSORIES

Synexis CTH 30 Charging compartment for handheld transmitter . . . . . Order # 723.762

# Synexis C30

## DIMENSIONS

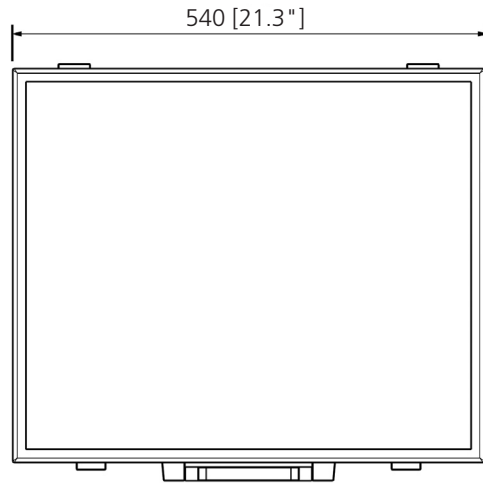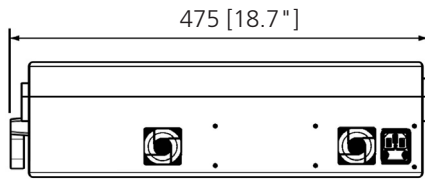

Dimensions in mm [inch]

## TECHNICAL SPECIFICATIONS

AC input . . . . . 100 - 240 V, 50/60 Hz  
Fuse . . . . . 2 x F 4A L 250V  
Full loading current . . . . . 2.2 A  
Power consumption . . . . . max. 75 W (incl. CTH 30)  
Max. charging time . . . . . 5 hours  
Ambient temperature . . . . . -5 to +40 °C [23 - 104 °F]  
Dimensions, incl. handle,  
base (W x D x H) . . . . . 540 x 145 x 475 mm  
[21.3" x 5.7" x 18.7"]  
Weight . . . . . 5,7 kg [12.6 lbs]  
Charging compartments . . . . . 30 for belt-pack transmitter/  
receiver, 1 for handheld  
transmitter (optional)

## ARCHITECT'S SPECIFICATIONS

The charging and storage device shall be made of rugged, lightweight aluminium with an enforced frame. The device shall be provided with charging compartments for a maximum of 30 belt-pack receivers/transmitters and a connection for an optional charging for one handheld transmitter. The insert shall be made of a special rigid foam conform with the UL 94 HBF for belt-pack receivers/transmitters, the cover shall be provided with burl foams. The device shall provide a compartment for accessories such as single-sided ear-headphones. The cover shall be removable and lockable. A shielded power supply shall be integrated in the case. The delivery shall include an ergonomic carrying handle, removable shoulder strap and power cable.

Manufacturer: beyerdynamic  
Type : Synexis C30

The optional charging compartment shall be for one handheld transmitter. The insert shall be made of a special rigid foam conform with the UL 94 HBF for one handheld transmitter incl. charging contacts and connecting cables.

Manufacturer: beyerdynamic  
Type: Synexis CTH 30