

# STEREO VIDEOMIC

X/Y Stereo Directional Video Condenser Microphone

**RØDE**<sup>®</sup>  
MICROPHONES

## Features


- Stereo X/Y Condenser Microphone
- Broadcast sound quality
- 9V battery powered
- Integrated shock mounting
- Two step High Pass Filter (Flat/80Hz)
- Rugged cast aluminium body
- Low noise circuitry
- Custom designed integrated windshield
- 3.5mm mini-jack output
- Integrated cold-shoe mount, 1/4" and 3/8" thread
- Designed and manufactured in Australia
- Full 10 year warranty\*




## Specifications

Acoustic Principle	Pressure Gradient	Directional Pattern	Super-Cardioid
Frequency Range	40Hz ~ 20,000Hz (selectable HPF@80Hz)	Sensitivity	-38dB $\pm$ 2dB re 1V/Pa @ 1kHz
Nominal Impedence	200 $\Omega$	Equivalent Noise	20dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1k $\Omega$ )	Dynamic Range	115dB (per IEC651)
Maximum SPL	134dB (@ 1kHz, 1% THD into 1k $\Omega$ load)	Signal/Noise	74dB SPL (A - weighted per IEC651)
Power Req.	9V alkaline battery (Current 7mA)	Dimensions	170mmL x 102mmH x 65mmD
Output Connection	3.5mm stereo mini-jack	Net Weight	176g

## Frequency Response

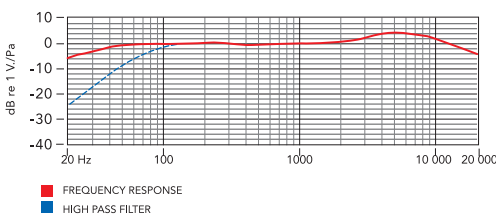

## Polar Pattern



## Included Accessories

- DeadKitten windscreen



[www.rodemic.com](http://www.rodemic.com)

\*After online registration

Australia  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855    Fx: +61 2 9648 2455

USA  
6385 Rose Lane, Carpinteria CA 93013 USA  
Ph: +1 805 566 7777    Fx: +1 805 566 0071